

JTECH[®] EXTEND

Two-Way Radios

Scanning Guide



Turn On Scanning

Press the key programmed as "Scan," a short press of the S/M is the default.



How to Know it's Working

The scan icon displays and the radio begins to scan the channels.



Activity Detected

When the radio detects activity, it stops on that channel and displays the channel number.



Talking On Active Channel

To talk to the person transmitting without switching channels, press the Push-to-talk button before scan resumes.

If no activity occurs for 4 seconds, scanning will resume.



Turn Off Scanning

To stop scanning, press the "Scan" key, a short press of the S/M is the default.



How to Call on Original Channel

Press the Push-to-talk button while the radio is scanning, and the radio will transmit on the channel you were on before you activated scan.

JTECH[®] EXTEND Two-Way Radios

Scanning Guide

Additional Features



Scan Advance


If the radio stops scanning on a channel you do not want to listen to, press the up key to resume scanning for the next active channel.




Nuisance Delete

Press and hold the down key to temporarily remove a channel from the scan list. The channel returns to the scan list when the radio is turned off & then on again.

Normal Scan Sequence

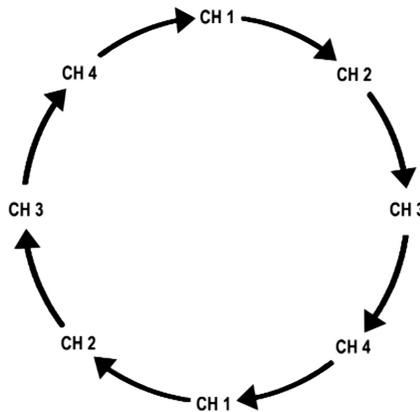

Priority Scan Sequence

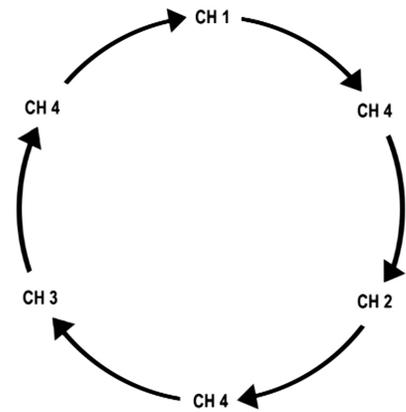

Priority Channel

Priority scanning allows one channel to be sampled more regularly for activity, even when the radio is currently receiving on another channel.

If the radio is receiving on a non-priority channel, the priority channel is still scanned, once every 3 seconds. The radio will switch to the priority channel once any activity is detected.

The priority channel is programmed by the dealer via programming software or by the radio's keypad if full radio programming is activated.